

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
3 May 2001 (03.05.2001)

PCT

(10) International Publication Number  
**WO 01/30490 A1**

- (51) International Patent Classification?: **B01J 19/00**, **B01L 3/00** **BJORNSON, Torlief, Ove**; 7030 Daniel Court, Gilroy, CA 95020 (US).
- (21) International Application Number: **PCT/US00/41275** (74) Agents: **ROWLAND, Bertram, I. et al.**; Rae-Venter Law Group, P.C., P.O. Box 60039, Palo Alto, CA 94306 (US).
- (22) International Filing Date: 18 October 2000 (18.10.2000) (81) Designated States (national): AU, CA, JP.
- (25) Filing Language: English (84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
- (26) Publication Language: English
- (30) Priority Data: 60/161,203 22 October 1999 (22.10.1999) US **Published:**  
— With international search report.  
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.
- (71) Applicant: **ACLARA BIOSCIENCES, INC.** [US/US]; 1288 Pear Avenue, Mountain View, CA 94043-1432 (US).
- (72) Inventors: **SCHAEVITZ, Sam**; MIT, 3 Ames Street, Box 314, Cambridge, MA 02139 (US). **BOONE, Travis**; 765 San Antonio Road #25, Palo Alto, CA 94303 (US). *For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SEALING FOR MICROFLUIDIC DEVICES

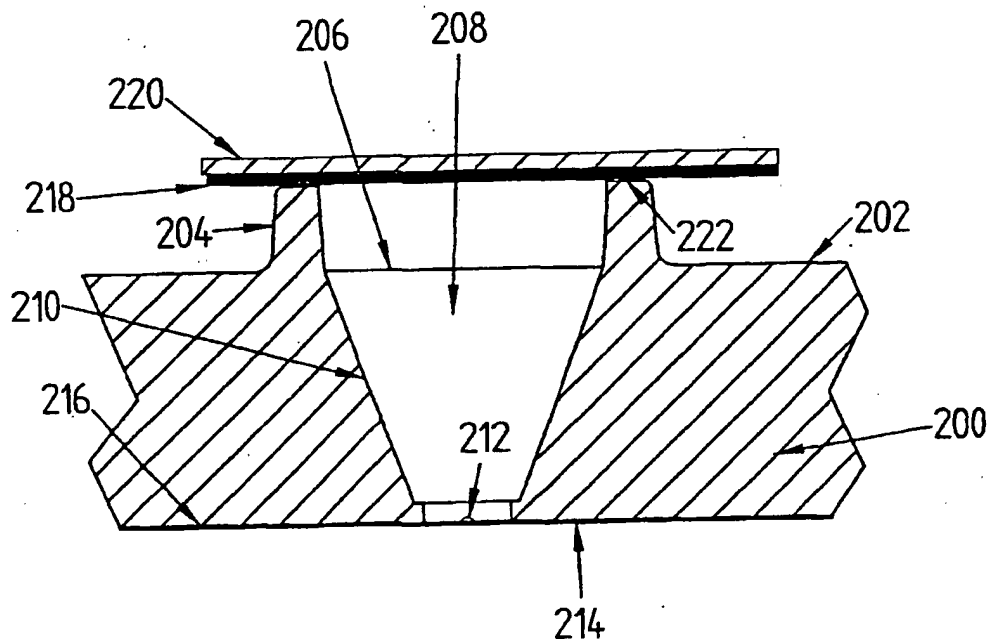

(57) Abstract: Improved sealing for microstructures in microfluidic devices (100, 150) having a plurality of units (152) is provided by providing collars (104, 204) surrounding the openings (206) to the microstructures, such as reservoirs (208). The collars (104, 204) are protrusions extending from the surface (108, 202) of the devices (100, 150) and the internal walls (210) of the collars (104, 204) generally aligned with the internal walls (210) of the microstructure. Conformable and/or adhesive lids (218, 220) are employed for sealing the microstructures.

WO 01/30490 A1

## SEALING FOR MICROFLUIDIC DEVICES

INTRODUCTION

5

Field of the Invention

The field of this invention is microfluidic devices.

10 Background

Microfluidic devices offer great promise for the accurate manipulation of very small volumes, the rapid execution of a wide variety of operations, the minimal use of reagents, as well as many other benefits. As with all situations, the benefits come with challenges. For many purposes, one wishes to have a number of independent electrokinetic units in a single substrate. Since each unit will frequently comprise a plurality of reservoirs and channels, it is important that the individual units do not communicate except as required by the design of the device. Also importantly, is the problem of the very small volumes, which are frequently involved with the operations, due to evaporation. Where there is an interest in doing a quantitative analysis of an operation involving kinetics, it is important that the solvent volume remain substantially constant, so that the concentrations of the reactants are not changing due to decreasing volume. To this end, methods are required to minimize evaporation. Additionally, particularly where long incubation times and/or long reaction times are involved, there is an interest in preventing contamination. A further concern is adventitious pressurization, during closing of a microstructure vessel, which could prematurely move the liquid from a reservoir into a channel.

25

In response to these concerns, lids have been used to seal the ports of microfluidic devices. Lids may provide sealing through the pressure of their weight, by providing adhesion, using various forms of latches or clasps, or by fitting snugly around a part and held by friction.

30

There is an interest in developing devices and methods to substantially diminish the injurious events that may occur due to open ports of a microfluidic device, where the devices are effective and can be readily fabricated and methods readily performed.

Relevant Art

U.S. Patent no. 5,444,890 and references cited therein describe leakage-proof sealing of microfluidic devices. WO99/43432 describes microfluidic devices and systems incorporating cover layers. U.S. Patent no. 5,545,280 describes applying adhesive to protrusions on a substrate.

SUMMARY OF THE INVENTION

Improved microfluidic devices are provided for use in performing operations involving the manipulation of small volumes. Substrates are formed comprising channels and reservoirs, where the channels communicate with the reservoirs and the channels are otherwise enclosed, and the reservoirs have an aligned collar in relief, extending beyond the planar surface of the substrate and outwardly from the border of the reservoir. The reservoirs are more efficiently sealed with an appropriate cover which contacts the crown of the collar. The substrates may be formed by plastic molding or other means. Of particular interest are devices employing electrokinesis for movement of solutions from one site to another in the device, where the substrate comprises a plurality of individual electrokinetic units and the volumes involved generally are below about 5 $\mu$ l.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a plan view of a device with collars around microstructures; Fig. 1a is a cross-sectional view of the device of Fig. 1 along lines 1a-1a;

Fig. 2 is a plan view of the device of Fig. 1, with the collars removed to provide details of the individual units; Fig. 2a is a diagrammatic exploded view of the units of Fig. 2;

Fig. 3 is a side elevation cross-sectional view of a reservoir microstructure of a unit with a cover.

### DESCRIPTION OF THE SPECIFIC EMBODIMENTS

The following examples are offered by way of illustration of the present invention, not limitation. Microfluidic devices are provided for manipulation of small volumes, where the devices comprise a substrate, usually an organic substrate in which are channels and reservoirs, where the reservoirs have a raised collar above the planar surface of the substrate. A bottom film, including a rigid substrate, is adhered to and encloses the channels and the bottoms of the reservoirs. The reservoirs can be sealed on the top side using a film, which seals to the upper surface of the collar.

10 The microfluidic devices will be characterized by having one or more operational units present in the substrate, where the number of units may vary from 16 to 1536 units, more usually not more than about 384 units, the number of units frequently being related to the number of wells in a microtiter well plate. Each unit will have at least one channel and at least two reservoirs, usually having at least two channels and at least four reservoirs. The total number of reservoirs for a device will generally be in the range of about 4 to 1600, more usually in the range of about 64 to 1500.

The sealing cover or lid will be a film, which forms a seal about the collar, so as to at least substantially inhibit fluid flow from the reservoir. The cover will provide for sealing interaction with the collar upper surface, as a result of a compliant surface contacting the collar or an adhesive surface adhering to the upper surface of the collar, particularly an adhesive surface, which is removable. Contact will usually be minimal or not at all between the sealing cover or lid and the planar surface. The forces providing the sealing may be gravity, adhesive forces, or mechanical forces. For compliant surfaces, such as elastomeric films, skin-surface (closed-cell) foams, soft films, pressure would be applied, as a result of a weighted backing, latching or gripping devices for holding the film against the collars, a vacuum chuck which holds the film in position and can release the film, as appropriate, etc. The film may be stretched across the collars, held in position by clasps at the periphery of the substrate, a sealing pliable band around the periphery, a vacuum chuck, etc. A continuous sealing film may be used, which may be unrolled from a reel as the devices are moved in a continuous manner, for example, on a wheel or moving belt. The films may be natural rubber, polyisoprene, ethylene-propylene elastomers, polyurethane foams, polydimethylsiloxane, etc. The films may be thin or thick, so

long as they have a minimum dimension, which provides for their sealing of the collars.

Generally, the films will be at least about  $50\mu$  in thickness. Alternatively, films may be used, which have a thin adherent layer, which will adhere to the surface of the collar and after the film has fulfilled its function, the adhesive may be removed. Useful adhesives include pressure  
5 sensitive adhesives, such as ethylene-containing polymers, urethane polymers, butyl rubber, butadiene-acrylonitrile polymers, butadiene-acrylonitrile-isoprene polymers, and the like. See, for example, U.S. Patent no. 5,908,695 and references cited therein.

The substrate will generally have a thickness of at least about  $20\mu\text{m}$ , more usually at least about  $40\mu\text{m}$ , and not more than about  $0.5\text{cm}$ , usually not more than about  $0.25\text{cm}$ . The  
10 width of the substrate will be determined by the number of units to be accommodated and may be as small as about  $2\text{mm}$  and up to about  $6\text{cm}$  or more. The dimension in the other direction will generally be at least about  $0.5\text{cm}$  and not more than about  $20\text{cm}$ , usually not more than about  $10\text{cm}$ . The substrate may be a flexible film or relatively inflexible solid, where the microstructures, such as reservoirs and channels, may be provided by embossing, molding,  
15 machining, etc. The collars may be formed at the same time using the same process, although more expensive processes may be used, such as photolithography or laser ablation. In this case, the collar regions would be protected while the substrate was eroded. The channel dimensions will generally be in the range of about  $0.1\mu\text{m}$  to  $1\text{mm}$  deep and about  $0.5\mu\text{m}$  to  $500\mu\text{m}$  wide, where the cross-section will generally be  $0.1\mu\text{m}^2$  to about  $0.25\text{mm}^2$ . The channel lengths will  
20 vary widely depending on the operation for which the channel is to be used, generally being in the range of about  $0.05\text{mm}$  to  $10\text{cm}$ , more usually in the range of about  $0.5\text{mm}$  to  $1\text{cm}$ . The reservoirs will generally have volumes in the range of about  $10\text{nl}$  to  $10\mu\text{l}$ , more usually have volumes in the range of about  $20\text{nl}$  to  $1\mu\text{l}$ . The reservoirs may be cylindrically shaped or conically shaped, particularly inverted cones, where the diameter of the port will be from about  
25 1.5 to 25 times, usually 1.5 to 15 times, the diameter of the bottom of the reservoir, where the reservoir connects to the channel.

Depending upon whether a film is embossed to produce the device or the device is molded, whether the microfeatures are left open will depend upon whether a supporting film and/or an enclosing film is provided. The supporting film will generally be at least about  $40\mu\text{m}$   
30 and not more than about  $5\text{mm}$  thick. The film used to enclose the channels and the bottom of the reservoirs will generally have a thickness in the range of about  $10\mu\text{m}$  to  $2\text{mm}$ , more usually

in the range of about 20 $\mu$ m to 1mm. The selected thickness is primarily one of convenience and assurance of good sealing and the manner in which the devices will be used to accommodate instrumentation. Therefore, the ranges are not critical.

The collars surrounding the reservoir ports will generally have a height from the planar surface of the substrate in the range of about 0.1 to 1mm, more usually about 0.2 to 1mm, and preferably about 0.25 to 0.75mm. The crown will be thick enough to provide a good seal between the sealing film or lid and the crown, so that usually it will be about 0.05 to 1mm thick, more usually about 0.1 to about 0.5mm thick. The collars may be considered extensions of the inner walls of the microstructures, having an inner wall aligned with the inner wall of the microstructure, where the collars then extend outwardly from the inner wall, much like the structure of a volcano. Alternatively, the collar inner wall may be displaced from the reservoir inner wall, generally displaced less than about 1mm, usually less than about 0.5mm and may be less than about 0.1mm. In this way the inner wall is offset from the edge of the reservoir, serving as a fence around the reservoir.

The area occupied by a single unit will vary widely, depending on the number of units of the device, the function of the units, and the like. As illustrative, for the most part, where the devices are designed to be compatible with 96 to 384 microtiter well plates, the units will have from about 4.5 to 9mm spacings.

As indicated, the substrate may be a flexible film or inflexible solid, so the method of fabrication will vary with the nature of the substrate. For embossing, at least two films will be used, where the films may be drawn from rolls, one film embossed and the other film adhered to the embossed film to provide a physical support. The individual units may be scored, so as to be capable of being used separately, or the roll of devices retained intact. See, for example, application serial no. PCT/98/21869. Where the devices are fabricated individually, they will usually be molded, using conventional molding techniques. The substrates and accompanying film will generally be plastic, particularly organic polymers, where the polymers include addition polymers, such as acrylates, methacrylates, polyolefins, polystyrene, etc. or condensation polymers, such as polyethers, polyesters, polyamides, polyimides, etc. Desirably, the polymers will have low fluorescence inherently or can be made so by additives or bleaching. The underlying enclosing film will then be adhered to a substrate by any convenient means, such



as thermal bonding, adhesives, etc. The literature has many examples of adhering such films, see, for example, U.S. Patent nos. 4,558,333; and 5,500,071.

Liquids may be moved through the units by any convenient means, including electrokinesis, pneumatics, sonics, thermal, etc. Electrokinetic devices will usually have two or more reservoirs connected by microchannels, where the microchannels may cross, providing for injection of a plug from one microchannel into another microchannel. The devices may find use in sequencing of nucleic acids, detection of binding between two entities, e.g. proteins with proteins, small molecules or cells, or various assays for the determination of drugs, single nucleotide polymorphisms, etc.

The methods employing the subject devices may be associated with the transfer to the microstructures of the devices of volumes ranging from about 10nl to 500 $\mu$ l, with reaction volumes ranging from about 20nl to 0.5ml, usually 50nl to 0.1ml. The volumes may be transferred by any efficient means, including pins, ink-jet dispensers, other piezoelectric devices, pipettes, etc. After the liquid is dispensed, the applicable seal may be applied. Instead of dispensing liquid into the microstructure, the process may involve withdrawing liquid from the microstructure. Where the seal is in place, the seal would be removed, the liquid withdrawn from the microstructure and the seal replaced. In this way the integrity of the concentration of the solution in the microstructure may be maintained. Alternatively, one may have a self-sealing film, where the seal would be pierced for the transfer of liquid.

For further understanding of the invention, the drawings will now be considered. In Fig. 1 is depicted a plan view of a microfluidic device having 96 units with the spacing appropriate to a 96 well microtiter plate, where the spacing of the collars is shown. The device 100 has a substrate 102 with collars 104 associated with the reservoirs 106. In Fig. 1a, a cross-sectional view is shown of the device 100. The device 100 is shown with reservoirs 106, only two reservoirs being shown for clarity. Above the reservoirs 106 on the upper planar surface 108 of the device are collars 104. An enclosing film 110 provides the bottom of the device, serving to enclose the reservoirs 106 and channels 112.

In Fig. 2, the device 150 is shown with the sealing film removed to provide the detail of the individual microfluidic units 152. An expanded version of the microfluidic units 152 is depicted in a diagrammatic plan view in Fig. 2a. This unit is for illustration purposes only and demonstrates a unit for performing a reaction with incubation, followed by separating the

components of the reaction mixture using electrophoresis and identifying the product with a detector, not shown. The unit 152 has a separation channel 154, beginning with electrophoresis buffer reservoir 156 and terminating in waste reservoir 158. The assay channel 160 begins with a reagent incubation reservoir 162 and ends with a second waste reservoir 164. The reagent incubation reservoir 162 receives the various components of the reaction where the reagents may react. Some of the liquid in the reagent incubation reservoir 162 may wick by capillary action through the separation channel to a stop-junction reservoir 168 provided in assay channel 160 to stop the movement of the reaction solution. After sufficient time for incubation liquid remaining in the reagent incubation reservoir 162 is moved by pressure to the stop-junction reservoir 168 and the electrophoretic process begun by introducing electrodes into the waste reservoirs 158 and 164, the stop-junction reservoir 168 and the buffer reservoir 156. By activating the electrodes in the stop-junction reservoir 168 and the waste reservoir 164, the reaction components may be moved to cross-section 166 for injection into separation channel 154. The electrodes in the reservoirs 164 and 168 may then be allowed to float, while the electrodes in buffer reservoir 156 and waste reservoir 158 are activated for electrophoretic transport and separation in separation channel 154 for detection of product.

In Fig. 3 is shown a cross-section of a reservoir with the collar on a substrate. The substrate 200 has an upper planar surface 202. Extending upward from upper planar surface 202 is the external wall of collar 204. As shown in the Figure, the collar 204 meets with the upper opening 206 of reservoir 208. The wall 210 of reservoir 208 is shown as conical having a linearly even surface, but could be vertical or irregular, as needed. The reservoir wall 210 is aligned with the collar wall 204, having a smooth transition, being a single feature when molding the substrate. As already indicated, the collar inner wall may be offset from the port edge. The reservoir 208 terminates at the bottom into channel 212. The channel 212 is enclosed by film 214, which adheres to the bottom surface 216 of the substrate. The reservoir 208 is enclosed by a conformable cover film 218, backed by a weighted backing 220, to hold the film 218 in sealing relationship with the top surface 222 of collar 204.

The subject invention provides many advantages in enclosing, usually reversibly, small reservoirs or other microstructure. The subject collar structure has a small contact area, which serves to concentrate the force produced by whatever means of application of the lid onto a much smaller area, as compared to a cover which bonds to the entire surface of the device. A

reduction in differential pressures created during application of the lid is achieved. Where the upper surface is flat, without areas in relief, a conformal lid comes down in such a way that it will usually first make contact with a large ring around the area to be sealed. The air trapped within this ring is pressurized into the volume to be sealed. By contrast with the subject

5 structure, the lid makes contact before it reaches the device main surface, avoiding trapping large volumes of air. In addition, for lid attachment mechanisms like gravity, friction and mechanical clips, where the force is not directly related to the contact area, the subject method increases the local pressure with which the lid is attached to the part. This increased pressure generally improves the seal and improves the proximity of conformal lids. This improved seal can enable

10 the use of a weighted lid to produce an airtight seal without requiring a large mass or an extremely conformable lid material. Where the seal is substantially air tight, the lid will act to resist or prevent fluid flow. Capillary stop junctions may be prone to failure by condensation or other mechanism, in which case the sealed lid provides a backup mechanism. Also, the sealed lid can easily counteract relatively strong fluidic forces, such as surface tension. Yet another

---

15 advantage of the collar is that the effective leakage path (surface path) between two adjacent wells is increased. This increases the resistance to arcing due to high differential voltages in two adjacent wells. In fact, multiple concentric collars would be beneficial in further reducing this problem. Finally, during application and removal of a lid, there is a potential for liquids to wick between the lid and the surface of the device and microstructures. The short distance between

20 the device and the lid can result in very strong capillary pressures. In the subject invention the lid is only in close proximity to the collar surface, so that fluid can only wick along that surface. By avoiding continuous ridges between different microstructures, movement of liquid between the microstructures can be obviated.

All publications and patent applications mentioned in this specification are indicative of

25 the level of skill of those skilled in the art to which this invention pertains. All publications and patent applications are herein incorporated by reference to the same extent as if each individual publication or patent application was specifically and individually indicated to be incorporate by reference.

The invention now having been fully described, it will be apparent to one of ordinary

30 skill in the art that many changes and modifications can be made thereto without departing from the spirit or scope of the appended claims.

## WHAT IS CLAIMED IS:

1. A microfluidic device comprising a substrate having a planar surface, a plurality of openings in said surface of microstructures and at least a portion of said openings  
5 surrounded by a collar in relief.
2. A microfluidic device according to Claim 1, wherein said collar has its inner surface aligned with the inner surface of said opening and a thickness of from about 0.05 to 0.5mm thick extending away from said inner surface.
3. A microfluidic device according to Claim 2 wherein said collar is covered with a lid of a  
10 conformable material.
4. A microfluidic device according to Claim 2, wherein said collar is covered with a lid with an adhesive coating.
5. A microfluidic device according to Claim 1 produced by plastic molding.
6. A microfluidic device comprising a substrate having a planar surface, a plurality of  
15 reservoirs having openings in said surface, said reservoirs having volumes in the range of about 10nl to 10 $\mu$ l and at least a portion of said openings surrounded by a collar in relief, having an inner surface aligned with the inner surface of said reservoir, said collar having a height in the range of about 0.1 to 1mm and thickness of from about 0.05 to 0.5mm thick extending away from said inner surface.
- 20 7. A microfluidic device according to Claim 6, where at least a portion of said reservoirs are connected to one or more other reservoirs by microchannels.
8. A microfluidic device according to Claim 6, wherein at least a portion of said reservoirs are positioned in accordance with a 96, 384 or 1536 microtiter well format.
9. A microfluidic device according to Claim 6, wherein said collar is covered with a lid.
- 25 10. A microfluidic device according to Claim 9, wherein each collar is covered with a lid, which lid is a portion of a continuous film.
11. A microfluidic device according to Claim 6, wherein said substrate comprises an acrylic polymer and is molded.

12. In a method employing a microfluidic device comprising introducing small volumes into microstructures, where the volumes comprise volatile solvents, the improvement which comprises: introducing said small volumes into a device according to Claim 1; and applying a compliant or adhesive lead to each of said collars.
- 5 13. A method according to Claim 12, wherein said lid is a portion of a continuous film.
14. A method according to Claim 12, wherein said microstructures are components of an electrokinetic device.

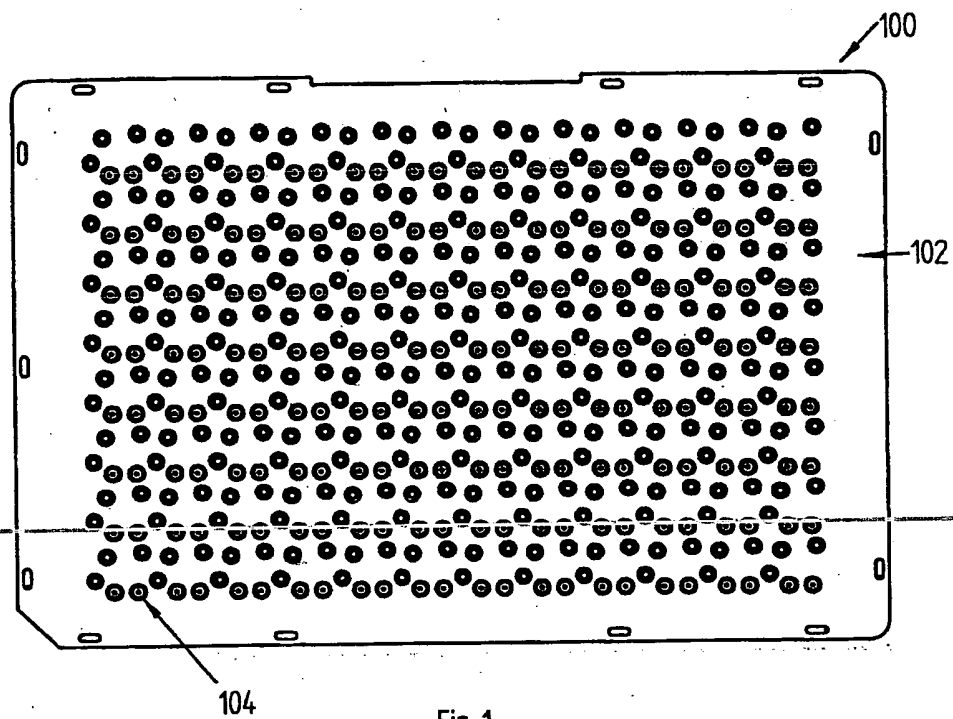


Fig. 1

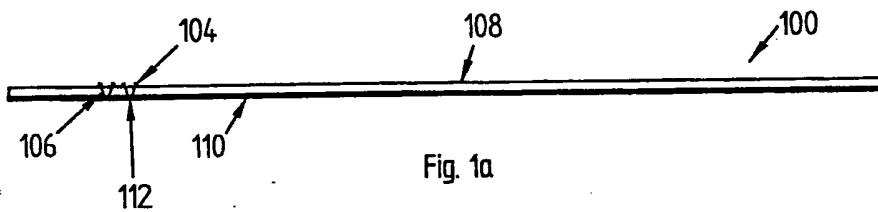


Fig. 1a

2/3

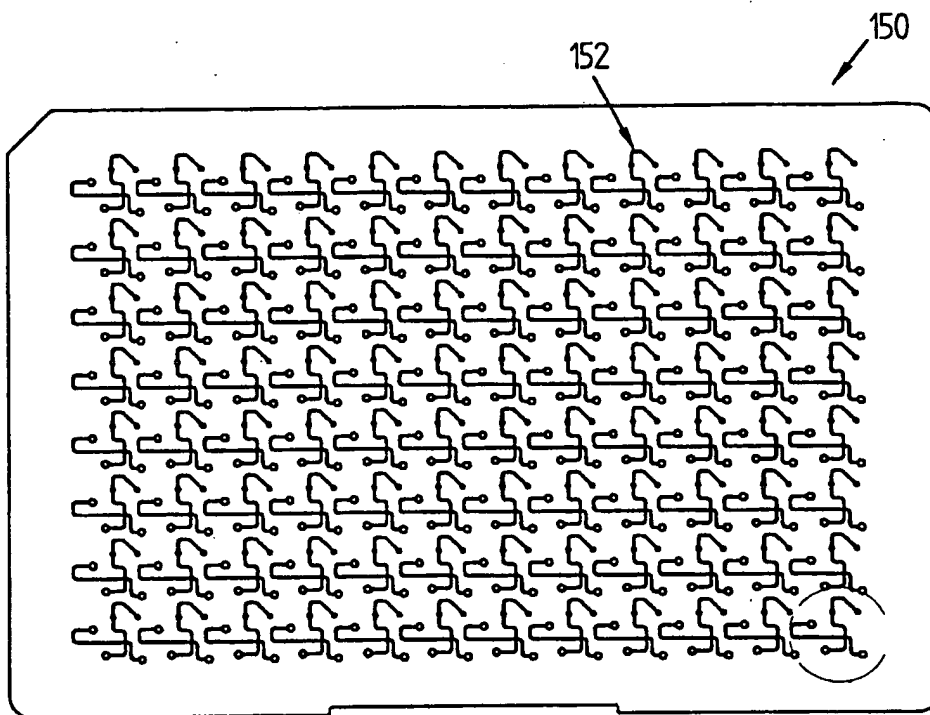


Fig. 2

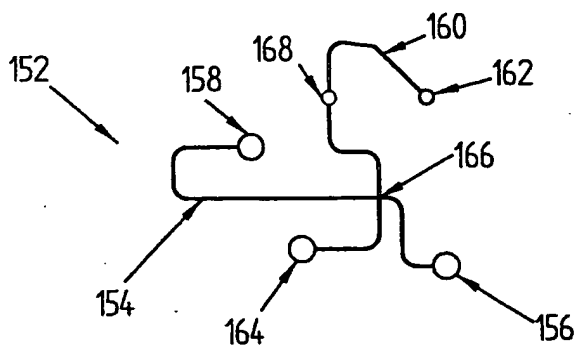


Fig. 2a

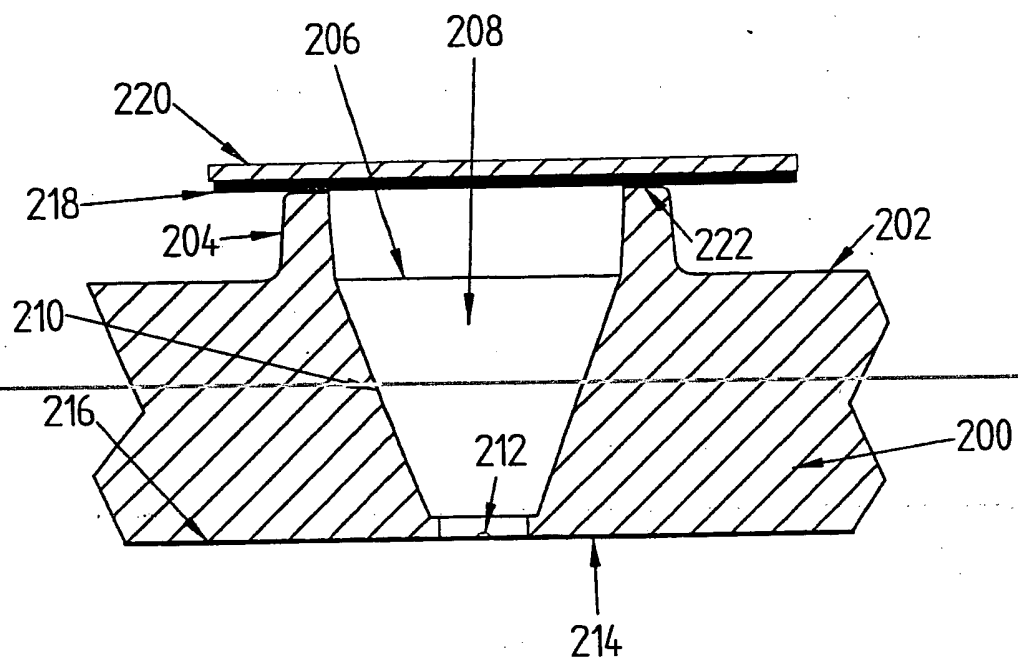


Fig. 3



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/41275

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B01J19/00 B01L3/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B01J B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 15876 A (ACLARA BIOSCIENCES, INC.) 1 April 1999 (1999-04-01) page 11, line 13 - line 27 page 12, line 35 -page 13, line 7 page 18, line 34 -page 19, line 8 page 21, line 37 -page 22, line 17 page 26, line 6 - line 11 page 40, line 20 -page 41, line 12 page 41, line 24 -page 42, line 1 figures 9-11	1,2
	--- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

14 March 2001

Date of mailing of the international search report

21/03/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan, 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Stevnsborg, N

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 00/41275

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>WO 94 12405 A (TECHNE (CAMBRIDGE) LIMITED) 9 June 1994 (1994-06-09) page 4, last paragraph -page 5, paragraph 5 page 6, paragraph 2 - paragraph 4 page 8, paragraph 2 - paragraph 3 page 8, last line -page 9, paragraph 1 page 9, paragraph 3 - paragraph 4 page 10, paragraph 3 page 11, paragraphs 2,5 page 12, paragraph 2 figures 1A,1B,5-8</p>	1-5
X	<p>US 5 227 137 A (PATRICIA C. MONTI ET AL.) 13 July 1993 (1993-07-13) column 1, line 61 - line 65 column 6, line 31 - line 65 figure 4B</p>	1
X	<p>US 5 141 719 A (GEORGE G. FERNWOOD ET AL.) 25 August 1992 (1992-08-25) column 4, line 23 -column 5, line 6 figures 2A,2B</p>	1
X	<p>US 5 604 130 A (BRIAN D. WARNER ET AL.) 18 February 1997 (1997-02-18) column 5, line 25 - line 58 figures 5A-5D</p>	1
X	<p>US 5 252 294 A (WALTER KROY ET AL.) 12 October 1993 (1993-10-12) abstract; figure 5</p>	1
X	<p>WO 97 37755 A (SARNOFF CORPORATION) 16 October 1997 (1997-10-16) page 1, line 8 - line 14 page 2, line 8 - line 10 page 3, line 21 -page 4, line 7 page 7, line 5 - line 19 page 9, line 29 -page 10, line 19 page 12, line 10 - line 15 page 13, line 5 - line 10 page 14, line 11 - line 13 page 18, line 18 - line 23 figures 4,5,6A,6B</p>	1,6-11
X	<p>US 5 846 396 A (PETER JOHN ZANZUCCHI ET AL.) 8 December 1998 (1998-12-08) column 1, line 14 - line 20 column 5, line 49 -column 6, line 12 column 15, line 47 -column 16, line 32 column 22, line 36 -column 23, line 32 figures 5A,,15A,,15B</p>	1,12-14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/41275

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9915876 A	01-04-1999	AU 9375498 A EP 1019696 A	12-04-1999 19-07-2000
WO 9412405 A	09-06-1994	AU 5427494 A	22-06-1994
US 5227137 A	13-07-1993	EP 0582638 A JP 6506869 T WO 9217261 A	16-02-1994 04-08-1994 15-10-1992
US 5141719 A	25-08-1992	CA 2043633 A,C DE 4123874 A FR 2664825 A GB 2246081 A,B IT 1250493 B JP 4227032 A	19-01-1992 23-01-1992 24-01-1992 22-01-1992 08-04-1995 17-08-1992
US 5604130 A	18-02-1997	AU 5882696 A EP 0828560 A JP 11507508 T WO 9639481 A	24-12-1996 18-03-1998 06-07-1999 12-12-1996
US 5252294 A	12-10-1993	DE 3818614 A DE 3825907 A AT 103508 T DE 58907327 D EP 0347579 A DE 8817007 U	07-12-1989 01-02-1990 15-04-1994 05-05-1994 27-12-1989 02-10-1991
WO 9737755 A	16-10-1997	US 5840256 A US 6033544 A AU 2609997 A CA 2251160 A EP 0892672 A JP 2000508961 T AU 4980397 A EP 0946302 A JP 2000510046 T WO 9816315 A	24-11-1998 07-03-2000 29-10-1997 16-10-1997 27-01-1999 18-07-2000 11-05-1998 06-10-1999 08-08-2000 23-04-1998
US 5846396 A	08-12-1998	US 5585069 A US 5632876 A US 5603351 A US 6120665 A US 5985119 A AU 705351 B AU 4152396 A AU 705659 B AU 4233796 A CA 2204912 A CA 2205066 A EP 0791238 A EP 0808456 A JP 11500602 T WO 9615450 A WO 9615576 A US 5681484 A US 5643738 A US 5593838 A	17-12-1996 27-05-1997 18-02-1997 19-09-2000 16-11-1999 20-05-1999 06-06-1996 27-05-1999 06-06-1996 23-05-1996 23-05-1996 27-08-1997 26-11-1997 19-01-1999 23-05-1996 23-05-1996 28-10-1997 01-07-1997 14-01-1997

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/41275

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5846396 A		US 5755942 A	26-05-1998
		US 5863708 A	26-01-1999
		US 5858804 A	12-01-1999
		AU 709581 B	02-09-1999
		AU 4233496 A	24-12-1996
		AU 714664 B	06-01-2000
		AU 4233596 A	24-12-1996
		CA 2223099 A	12-12-1996
		CA 2223166 A	12-12-1996
		CN 1193927 A	23-09-1998
		EP 0883442 A	16-12-1998
		EP 0869850 A	14-10-1998
		JP 11506183 T	02-06-1999
		JP 11506412 T	08-06-1999
		WO 9639252 A	12-12-1996
		WO 9639260 A	12-12-1996
		US 5842106 A	24-11-1998
		US 5858193 A	12-01-1999
		AU 6590096 A	09-01-1997
		WO 9642004 A	27-12-1996
		US 5980704 A	09-11-1999